


NOTE:
The flange-to-flange dimension is 1/2" larger than the outside dimension of curb, unless directed otherwise



CURB MOUNT-IMPACT MODIFIED ACRYLIC; THERMALLY BROKEN - SPECIFICATION:
Curb Mount-Acrylic; Thermally Broken, as manufactured by ORCA Manufacturing, Inc., with sealed insulated double acrylic domes (Clear over Clear standard, White or Bronze tints available as an option) in a welded thermally broken extruded aluminum sash. Each unit will have a built-in evaporative condensation gutter. Finish in bronze or mill (white gloss enamel as an option).

| | | | | | |
|-----------|------------------|---------|--------|----------|---------|
| CM-IMA-TB | | | | | |
| Model | Dimensions (F/F) | Glazing | Finish | Quantity | Project |

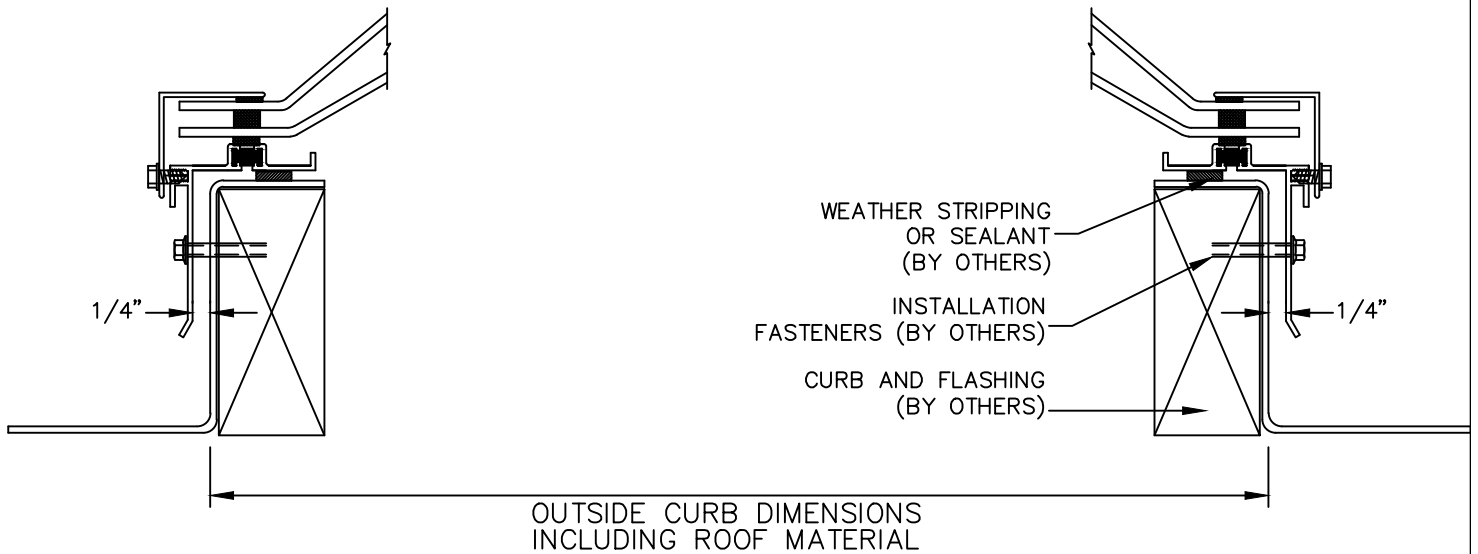

TITLE: CURB MOUNT IMPACT MODIFIED ACRYLIC - THERMALLY BROKEN - DOME

| | | |
|-----------|----------------|--------------------------|
| Rev. Date | April 11, 2012 | Sheet: 1 OF 1 |
| Drawn By | AP | |
| Rev. By | CRH | Dwg No. CMA-TB 041112 |
| Engineer: | AP | |

ORCA Manufacturing, inc.
P.O. Box 992
Hurlock, MD 21643
PHONE (800) 776-1539
FAX (410)-943-8245
www.starlightskylights.com